
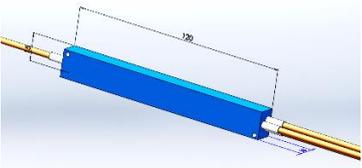


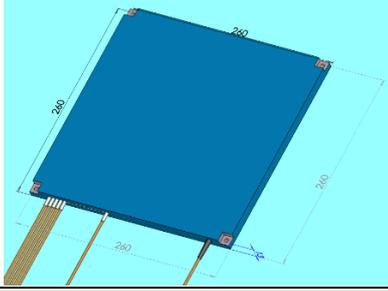
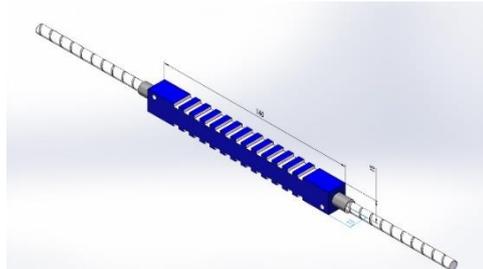








常用光纤耦合器产品封装尺寸手册

型号: A1	外型尺寸	安装孔尺寸	备注
	120x15x7mm	115x11mm 通孔: Φ 2.4mm 螺丝: M2	结构: 1x2 光缆: 2mm 3mm
型号: A2	外型尺寸	安装孔尺寸	备注
	120x15x10mm	115x11mm 通孔: Φ 2.4mm 螺丝: M2	结构: 1x3 光缆: 2mm 3mm
型号: A3	外型尺寸	安装孔尺寸	备注
	120x15x11mm	115x11mm 通孔: Φ 2.4mm 螺丝: M2	结构: 1x4 光缆: 2mm 3mm
型号: B1	外型尺寸	安装孔尺寸	备注
	110x67x15.5mm (适用超导封装)	NA	结构: 1x6~1x49 光缆: 1mm 2mm 3mm
型号: D1	外型尺寸	安装孔尺寸	备注
	260x260x13mm (适用超导封装)	248x248mm 通孔: Φ 5.3mm 螺丝: M5	结构: 1x8~1x16 光缆: 3mm
型号: A4	外型尺寸	安装孔尺寸	备注
	140x20x13mm 带散热槽结构 (适用超导封装)	130x14mm 通孔: Φ 3.2mm 螺丝: M3	结构: 1x1~7x19 光缆: 1mm 2mm 6mm

常用光纤耦合器产品封装尺寸手册

型号: T1 尺寸: $\Phi 3 \times 35 \text{mm}$	适用光纤	端口数量	护套选型
	105/125, 200/220	1x2	裸光纤
型号: T2 尺寸: $\Phi 3 \times 52 \text{mm}$	适用光纤	端口数量	护套选型
	105/125, 200/220	1x2	1mm
	105/125, 200/220	1x4	裸光纤
	300/330, 400/440	1x2	裸光纤
型号: T3 尺寸: $\Phi 3 \times 65 \text{mm}$	适用光纤	端口数量	护套选型
	105/125, 200/220	1x7	裸光纤
	105/125, 200/220	1x4	1mm
	300/330, 400/440	1x4	裸光纤
	600/660	1x2	裸光纤
型号: T6 尺寸: $\Phi 4 \times 80 \text{mm}$	适用光纤	端口数量	护套选型
	105/125, 200/220	1x7	1mm
	300/330, 400/440	1x4	1mm
	300/330, 400/440	1x2	2mm
型号: T7 尺寸: $\Phi 5 \times 80 \text{mm}$	适用光纤	端口数量	护套选型
	105/125, 200/220	1x8	1mm
型号: T8 尺寸: $\Phi 7 \times 80 \text{mm}$	适用光纤	端口数量	护套选型
	105/125, 200/220	1x19	1mm
	300/330, 400/440	1x7	1mm
	600/660	1x4	2mm